


Chimney Flashing

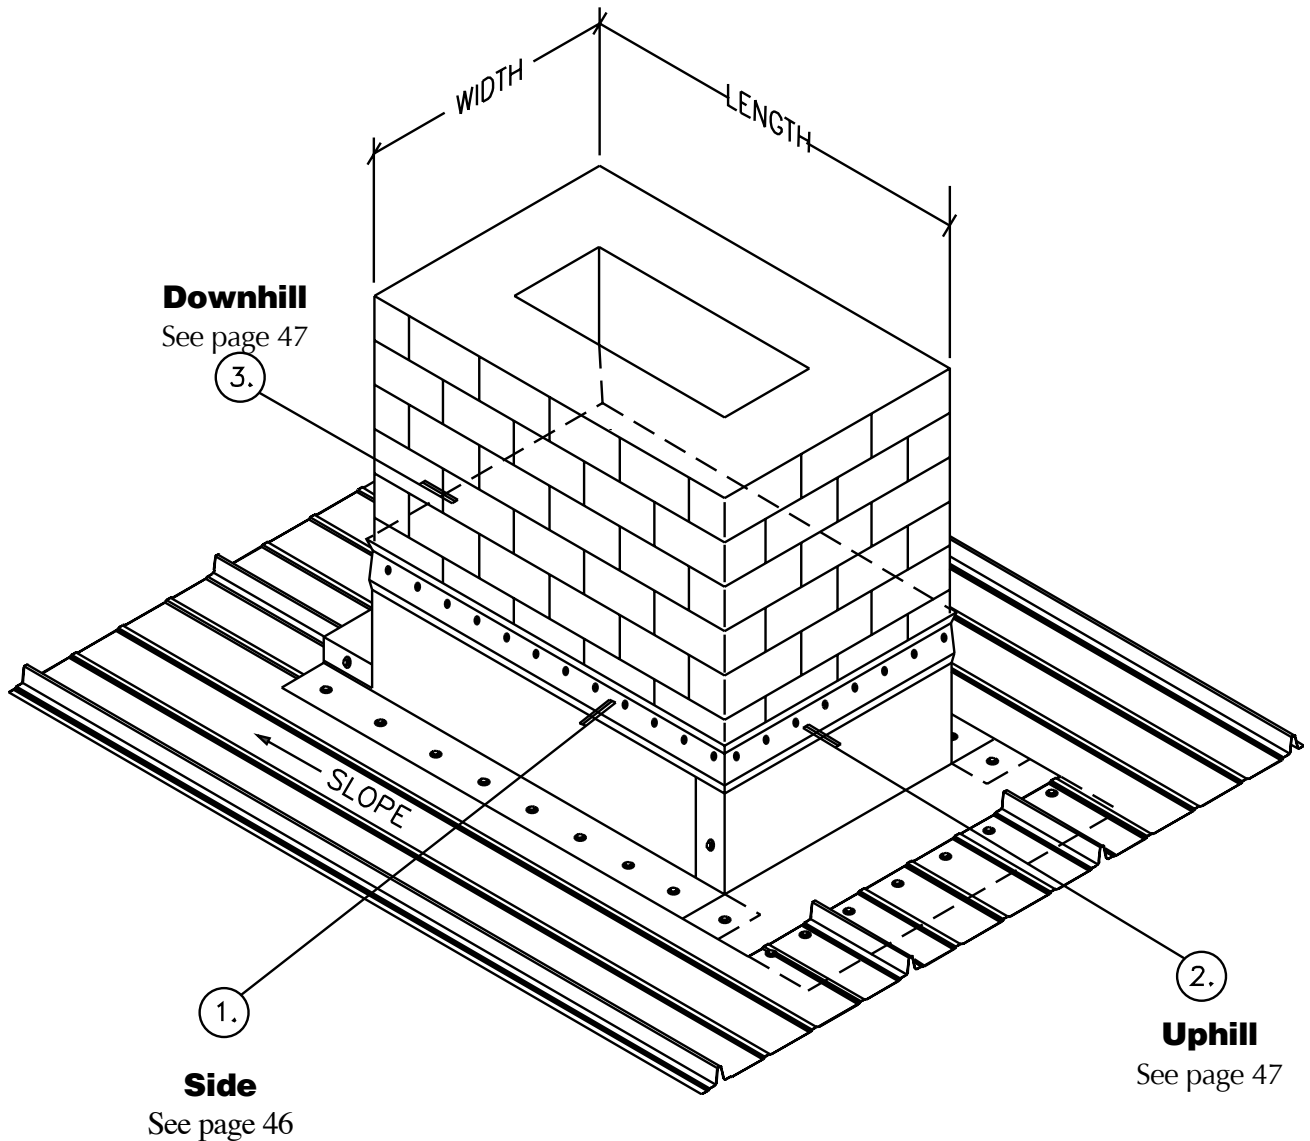

Note: Procedures for the installation of chimney flashings are similar to the skylights. (see pgs. 40-44). The reglet "RG16"*** shown may be deleted if the chimney is clad with siding. (Lap the siding over the flashing and caulk). Be sure to specify the slope and the orientation of the chimney dimensions when ordering this assembly.

*** A reglet is a flashing found on the side of a wall, chimney or other similar roof penetration. (See pgs. 46-47).