




Strata Rib®

STANDING BY OUR PRODUCTS
AND WARRANTIES FOR OVER 50 YEARS

Strata Rib is a light gauge, exposed fastener panel with 36" coverage used in residential, light-commercial and agricultural roof and wall applications.

FEATURES AND BENEFITS

- 36" coverage roof and wall panel.
- Roof Installation: Minimum 3:12 recommended.
Wall Installation: Horizontal or Vertical.
- 26 and 29ga in Dura Tech™ xl, ColorGuard 25 and in ZINCALUME® Plus.
- Limited Lifetime Warranty for residential applications.
- Custom manufactured panel lengths: 4'-6" to 45'-0".
- Matching polycarbonate panels available.
- Roof assemblies Class A Fire Rated when installed on non-combustible deck or framing per IBC, IRC or when installed in accordance to UL listings (UL790). Wall assemblies rated for fire resistance (UL263) when installed in accordance with UL listings.
- Class 4 Impact (Hail) Resistance rated per UL 2218.
- Panel evaluated by accredited third party. All structural performance data is contained within Building Code Approval Report: IAPMO-UES #ER-0550.

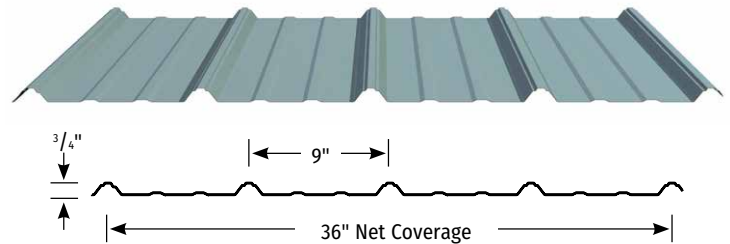

| | SMP COLORS | Dura Tech™ xl | | ColorGuard 25 |
|---|------------|----------------|----------|---------------|
| | | 29 Gauge | 26 Gauge | 29 Gauge |
| ZINCALUME® Plus | | AK, CA, OR, WA | CA, OR | — |
| Winter White | | AK, CA, OR, WA | CA, OR | WA |
| Surf White | | OR, WA | — | — |
| Light Stone | | AK | — | CA, OR, WA |
| Desert Beige | | AK, CA, OR, WA | — | WA |
| Cascade Gray | | OR | — | — |
| Taupe | | CA, OR, WA | — | — |
| Patina Steel | | CA, OR, WA | — | — |
| Chestnut Brown | | AK, CA, OR, WA | — | WA |
| Classic Brown | | AK, CA, OR, WA | — | — |
| Matte Black | | AK, CA, OR, WA | — | — |
| Canyon Red | | AK, CA, OR, WA | — | — |
| Rustic Red | | AK, CA, OR, WA | — | WA |
| Old Town Gray | | AK, CA, OR, WA | — | WA |
| Old Zinc Gray | | AK, CA, OR, WA | — | — |
| Weathered Copper | | AK, CA, OR, WA | CA, OR | — |
| Slate Gray | | AK, CA, OR, WA | — | — |
| Tahoe Blue | | AK, CA, OR, WA | OR | — |
| Everglade | | AK, CA, OR, WA | — | — |
| Denali Green | | AK, CA, OR, WA | CA, OR | WA |
| Forest Green | | AK, CA, OR, WA | — | WA |
| Copper Penny* | | AK, CA, OR, WA | — | — |
| Premium Color - Natural Rust* (subject to upcharge) | | AK, WA | — | — |

Cool DURA TECH XL

Keeps the heat out and the color brilliant.

- Superior color retention
- Chalk and fade resistant
- Energy saving colors.



A robust and economical paint system.

- Chalk and fade resistant
- Resist peeling or cracking for 25 years.



REPRESENTATION OF COLORS MAY VARY DUE TO PRINTING LIMITATIONS.

Sample color chips are available upon request. Consult your ASC Building Products representative for more information.

* Please note these colors are batch sensitive (may have color variation) and are directional in nature. Different batches are not to be mixed on projects. We recommend that you request a sample of current stocked material to review actual color before ordering to ensure color accuracy. We are not responsible for color variations.

Manufacturing Locations:

- AK - Anchorage, Alaska
- CA - Sacramento, California
- OR - Salem, Oregon
- WA - Spokane, Washington

LOAD TABLE

| Gauge | Span | Cond. | Positive (Inward) Uniform Load Capacity (lbs/ft²) / Span (ft.-in.) | | | | | | | | |
|-------|-------------|----------|--|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | 16" | 2'-0" | 2 -6" | 3'-0" | 3'-6" | 4'-0" | 4'-6" | 5'-0" | 6'-0" |
| 29 | Single Span | ASD, W/Ω | 230 | 102 | 65 | 45 | 33 | 25 | 20 | 16 | 11 |
| | | L/180 | - | - | 58 | 33 | 21 | 14 | 10 | 7 | 4 |
| | Double Span | ASD, W/Ω | 185 | 84 | 54 | 38 | 28 | 21 | 17 | 13 | 9 |
| 26 | Single Span | ASD, W/Ω | 285 | 126 | 81 | 56 | 41 | 32 | 25 | 20 | 14 |
| | | L/180 | - | - | 73 | 42 | 27 | 18 | 12 | 9 | 5 |
| | Double Span | ASD, W/Ω | 233 | 105 | 68 | 47 | 34 | 27 | 21 | 17 | 12 |
| 26 | Single Span | ASD, W/Ω | 285 | 131 | 85 | 59 | 43 | 33 | 26 | 21 | 15 |
| | | L/180 | - | - | - | - | - | - | - | - | - |
| | Triple Span | ASD, W/Ω | 285 | 131 | 85 | 59 | 43 | 33 | 26 | 21 | 15 |
| 26 | Single Span | ASD, W/Ω | 285 | 126 | 81 | 56 | 41 | 32 | 25 | 20 | 14 |
| | | L/180 | - | - | 73 | 42 | 27 | 18 | 12 | 9 | 5 |
| | Double Span | ASD, W/Ω | 233 | 105 | 68 | 47 | 34 | 27 | 21 | 17 | 12 |
| 26 | Single Span | ASD, W/Ω | 285 | 131 | 85 | 59 | 43 | 33 | 26 | 21 | 15 |
| | | L/180 | - | - | - | - | - | - | - | - | - |
| | Triple Span | ASD, W/Ω | 285 | 131 | 85 | 59 | 43 | 33 | 26 | 21 | 15 |
| 26 | Single Span | ASD, W/Ω | 285 | 126 | 81 | 56 | 41 | 32 | 25 | 20 | 14 |
| | | L/180 | - | - | 73 | 42 | 27 | 18 | 12 | 9 | 5 |
| | Double Span | ASD, W/Ω | 233 | 105 | 68 | 47 | 34 | 27 | 21 | 17 | 12 |
| 26 | Single Span | ASD, W/Ω | 285 | 131 | 85 | 59 | 43 | 33 | 26 | 21 | 15 |
| | | L/180 | - | - | - | - | - | - | - | - | - |
| | Triple Span | ASD, W/Ω | 285 | 131 | 85 | 59 | 43 | 33 | 26 | 21 | 15 |
| 26 | Single Span | ASD, W/Ω | 285 | 126 | 81 | 56 | 41 | 32 | 25 | 20 | 14 |
| | | L/180 | - | - | 73 | 42 | 27 | 18 | 12 | 9 | 5 |
| | Double Span | ASD, W/Ω | 233 | 105 | 68 | 47 | 34 | 27 | 21 | 17 | 12 |
| 26 | Single Span | ASD, W/Ω | 285 | 131 | 85 | 59 | 43 | 33 | 26 | 21 | 15 |
| | | L/180 | - | - | - | - | - | - | - | - | - |
| | Triple Span | ASD, W/Ω | 285 | 131 | 85 | 59 | 43 | 33 | 26 | 21 | 15 |

NOTES: Top values based on allowable stress (ASD). Bottom values based on a deflection limit of L/180. "-" denotes that the allowable load is limited by the panel stress vs. deflection limit.

Steel conforms to ASTM A653 (Galvanized) or ASTM A792 (ZINCALUME) structural steel.


Tabulated values are for positive (inward) uniform loading only.

Values are based on the American Iron and Steel Institute "Cold Formed Steel Design Manual" (AISI S100-16).

Refer to www.ascbp.com for more complete Strata Rib performance data.

| Gauge | Base Steel Thickness (in) | Yield (ksi) | Tensile (ksi) | Wt. (lbs/ft²) | Properties | | | |
|-------|---------------------------|-------------|---------------|---------------|-------------|-------------|-------------|-------------|
| | | | | | I+ (in⁴/ft) | S+ (in⁴/ft) | I- (in⁴/ft) | S- (in⁴/ft) |
| 29 | 0.0139 | 80 | 82 | 0.65 | 0.0103 | 0.0170 | 0.0081 | 0.0144 |
| 26 | 0.0173 | 80 | 82 | 0.81 | 0.0130 | 0.0211 | 0.0103 | 0.0181 |

NOTES: The moments of inertia, I+ and I-, presented for determining deflection are: $(2I_{effective} + I_{cross})/3$

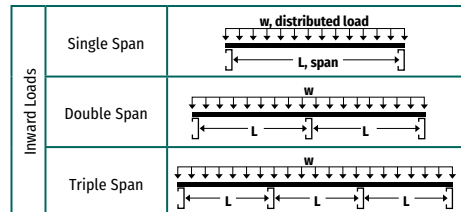

ASC Building Products is Proudly Distributed by: